

## BURDA 6001 - INSTRUCTIONS





average


semi fitted

burda sizes	yds m	55 ins / 140 cm						
		34	36	38	40	42	44	46
		2 1/4 →	2 1/4 →	2 1/4 →	2 1/4 →	2 1/2 →	2 1/2 →	2 1/2 →

→ with nap

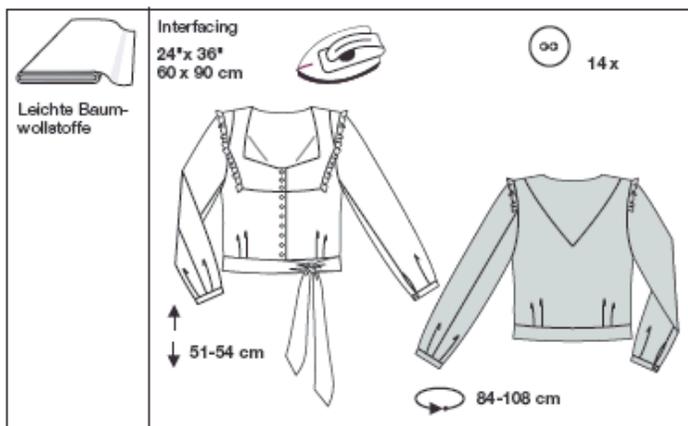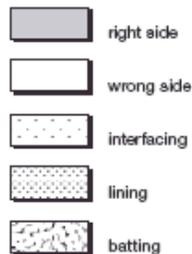

Patternpieces:

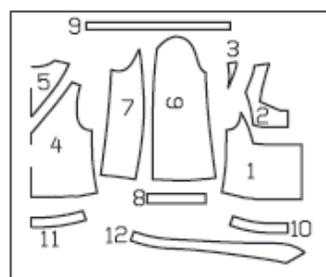

### Pattern Pieces

1 Front Piece	2x
2 Front Yoke	4x
3 Front Yoke	2x
4 Back Piece	1x
5 Back Yoke	2x
6 Upper Sleeves	2x
7 Lower Sleeves	2x
8 Cuff	2x
9 Frill	2x
10 Front Waistband	4x
11 Back Waistband	2x
12 Ribbon	4x

### CUTTING THE PRINTOUTS:

The pattern pieces are printed onto 25 sheets of paper, each with a thin frame. Wait until all sheets have printed. Arrange the pattern sheets according to the layout provided.

Cut each sheet at the upper and right edge along the thin frame lines. Start with the lower left sheet and glue the sheets together neatly at the thin frame line. Choose your size according to the Burda size chart: Dresses, blouses, jackets and coats according to your bust size, pants and skirts according to your hip size.

**Cut the pattern pieces for the design you wish to sew according to your size.**

Same distance to the lower edge as in size 34. The upper button hole is the same for all sizes. Draw in the third button hole in the middle. Place part 1 next to part 2 and draw in the remaining button holes with the same amount of space in between as in part 2.

### Lengthening or Shortening the Pattern

Our pattern is designed for a height of 5'6" (168 cm). If you are taller or shorter, you can adjust the cut to your height at the lines that say "shorten or lengthen here". That way the fit remains the same.

→ **Make sure that you adjust all pieces by the same amount at the same line.**

How to:

Cut the pattern pieces at the provided lines.

To lengthen push the parts apart as necessary.

To shorten, overlap the part as much as necessary.

Adjust the side edges. Redistribute the button holes

### CUTTING THE FABRIC

**Fabric Fold (- - -)** means: This is the middle of a pattern piece, but never an edge or a seam. The piece is cut so that it is twice the size of the pattern piece, with the fabric fold in the middle.

Pattern pieces with dotted outlines are placed onto the fabric with the printed side facing downward.


**The pattern shows you how to place the pattern pieces on the fabric.**

of the fabric. Those pieces that cover the fabric fold should be cut last with the fabric not folded.

**SEAM AND HEM ALLOWANCES** are included in the pattern:

5/8" (1.5 cm) at all edges and seams.

Using Burda tracing paper, transfer all lines and markings of the pattern onto the wrong side of the pattern. Instructions are included in the pattern.

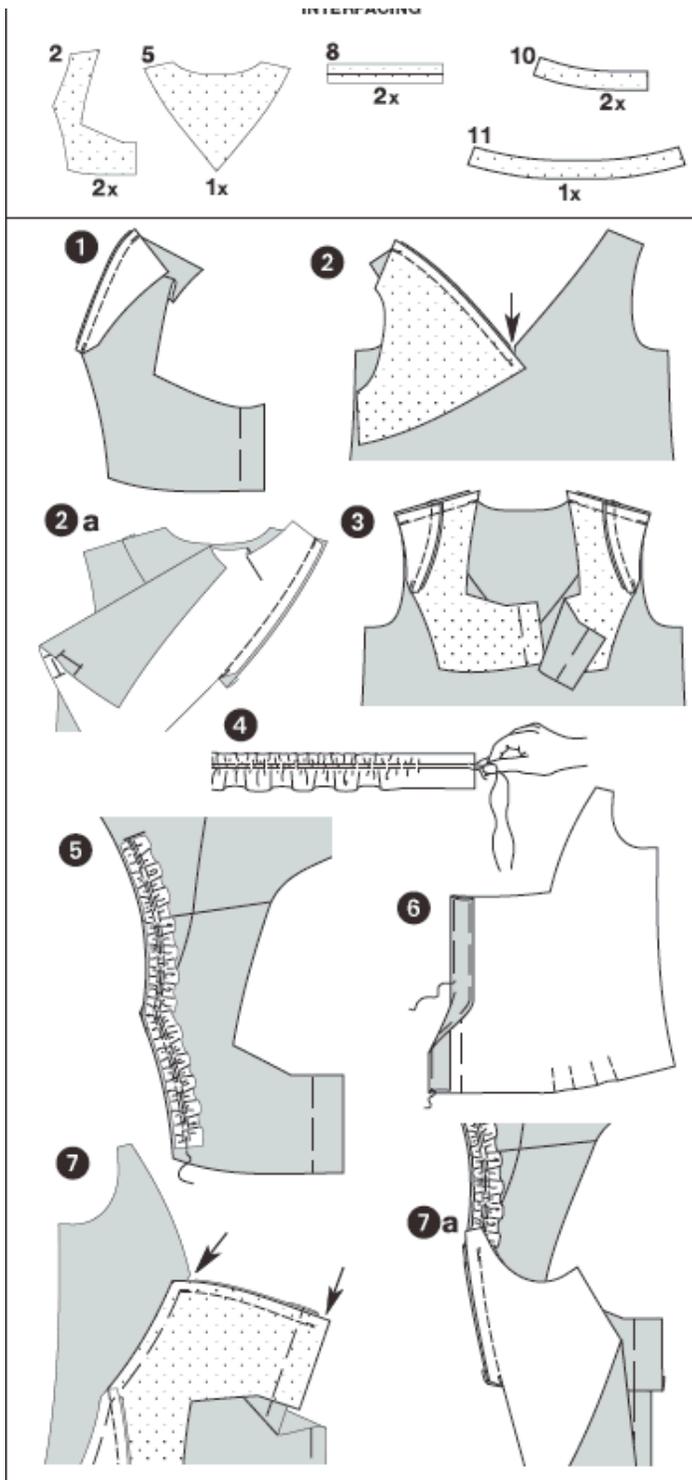

Cut interfacing according to drawings and iron onto the wrong side of the fabric.

### **SEWING**

**When sewing, the right sides of the fabric are facing.**

Transfer all lines on the pattern pieces onto the right side of the fabric with basting stitches.

### **BLOUSE**

#### **Front Yoke**

1.) Pin the smaller front yoke right sides facing onto the other front yoke (seam number 1) and stitch. Trim seam allowances and iron towards front.

#### **Back Yoke**

2.) Pin the back yoke to an edge of the back piece first, right sides facing (seam number 2) and stitch. Cut in the back piece in the back middle just shy of cutting in the seam (arrow). Stitch the second edge (2a). Trim seam allowances and iron into the yoke.

#### **Shoulder Seams**

3.) Place the front yokes right sides facing onto the back piece, pin the shoulder seams (seam number 3) and stitch. Trim seam allowances.

#### **Frill (edges unfinished)**

4.) To gather the frill, sew along the length of the frill with loose and wide stitches and be sure to leave a tail at both ends. Pull the bobbin thread so that it matches the length of the yoke's side edges and the sleeve's back base edge until you reach the vertical line (notch). Tie thread. Distribute width evenly.






5.) Pin the frill onto the side edge of the yoke and continuously over the sleeve base edge, as depicted, right sides facing. The frill ends at the vertical line.

#### **Front Edges**

6.) Fold the Front Edge (Creating the Button Facing) at the SELVAGE LINE, then at the TRIMMING SELVAGE, iron and pin.

#### **Stitching The Front Yoke**

7.) Stitch the front yoke onto the front piece, right sides facing, coming from the front edge until you reach the rounded edge (seam number 4). The seam allowance of the yoke is overlapping at the front edge (arrow). Stitch the remaining yoke, taking in the frill (7a). Trim seam allowances and iron into yoke.

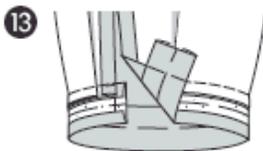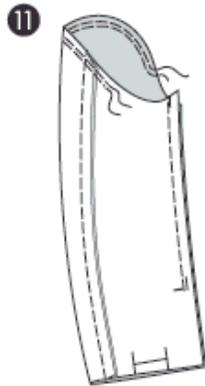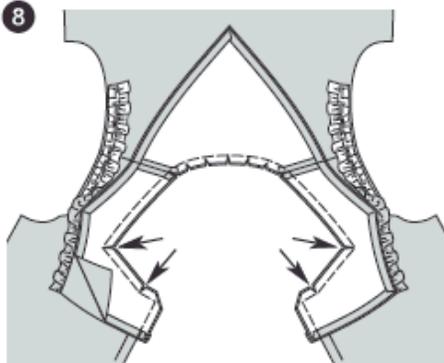

### **Doubling the yoke/ Neckline**

Stitch shoulder seams at the front and back yoke (seam number 3). Fold apart and iron seam allowances.

8.) Pin yoke right sides facing onto the yoke which has already been attached with the shoulder seams meeting.

Stitch the front edges (seam number 4) and the neckline edges onto another. Trim seam allowances and cut in at the rounded edges, cut edges diagonally. Cut the front yoke at the edges until you are just shy of cutting the stitching line (arrows)

9.) Turn yoke. Pin edges and iron. Pin inner edges onto the base seams.

Stitch yoke neatly at the base seams, taking in the inner yoke. (Stitch in the Ditch)

### **Side Seams**

Place front pieces right sides facing onto the back piece, stitch side seams (seam number 6), trim seam allowances, clean (serge) seam allowance held together, iron to one side.

### **Back Sleeve seams**

Place lower sleeve right sides facing onto the upper sleeve, pin back seam (seam number 8) and stitch. Trim seam allowances, clean seam allowance (serge) held together and iron into the lower sleeve.

10.) To hold the sleeve in place, place two large stitches next to each other from ● to ●.

### **Front Sleeve Seams/ Slit**


11.) Fold sleeve lengthwise, stitch front sleeves seams from top until you reach the slit mark (seam number 9), secure seam ends.

Trim seam allowances and fold apart, iron, fold in and iron the slit's seam allowance.

12.) Place pleats of the lower sleeve edge following the direction of the arrow and pin.

### **Cuffs**

13.) Pin the cuffs onto the lower sleeve edge (seam number 11) and let the underlap stick out at the upper sleeve. Stitch. Iron the seam allowances into the cuff. Fold over and iron the seam allowance of the other long edge.

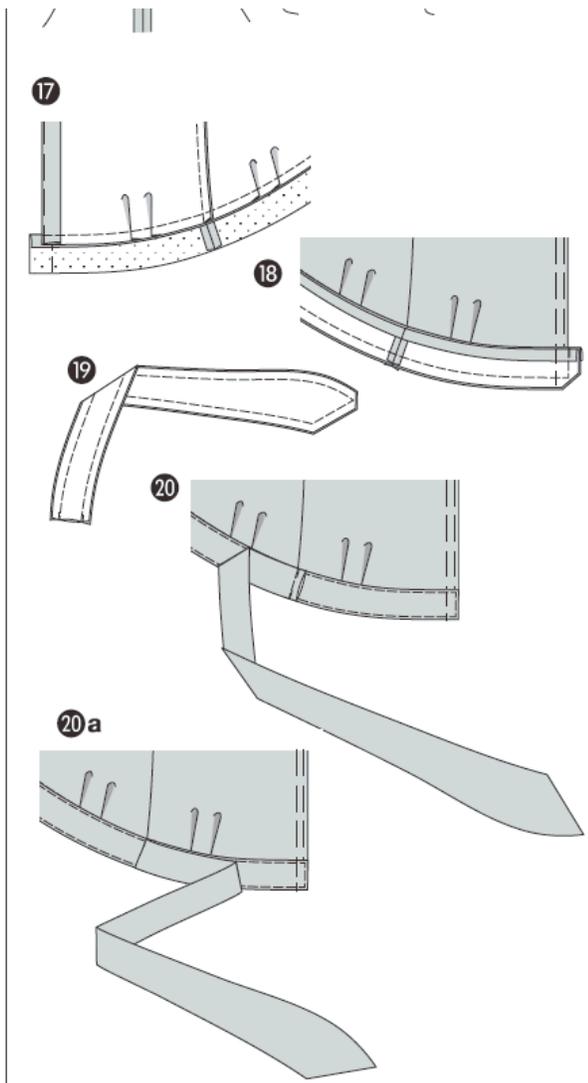

an edges of the cuff neatly, attaching the inner portion to the base seam. Add in **BUTTON HOLE**.

#### **Adding in Sleeves**

To keep the sleeves in place, pull the bobbin thread of the □ stitch line slightly.

15.) Place sleeves into the sleeve base right sides facing. When adding in sleeves, 4 points are important for the right fit:

→ The vertical lines (10) of the upper sleeve and the front piece have to meet. The vertical lines of the lower sleeve has to meet the side seam. The vertical line of the lower sleeve has to meet the side seam. The width in between the ● has to be distributed evenly to avoid wrinkles. Pin and stitch sleeves starting from the side of the sleeve. Neaten (serge) seam allowance and iron into the front and back piece.

#### **Waistband**

16.) Place pleats of the lower blouse edge following the direction of the arrow and pin.

Stitch the side seams of the lined an unlined waistband pieces (seam number 7).

17.) Pin the waistband with interfacing onto the lower blouse edge, side seams meet. Stitch. Trim seam allowances and iron them into the waistband.

At the waistband without interfacing, iron the seam allowance of the upper edge inward.

18.) Pin the waistband without the interfacing onto the waistband that has already been pinned, right sides facing, side seams meet. Stitch. Trim seam allowances and iron them into the waistband.

Turn waistband. Pin edges, iron. Pin the inner edge onto the base seam. Stitch all edges neatly, taking in the inner piece.

#### **Ribbon**

19.) Pin two pieces onto another each, right sides facing. Stitch edges onto another according to the drawing. Trim seam allowances, cut edges diagonally. Turn pieces. Pin edges, iron. Neaten open edges together

20.) Pin the ribbon onto the side seams so that the debasted seam allowances lie on the front waistband. Stitch the ribbons to the blouse, iron them to the front (20a).

Add in the **BUTTON HOLES** into the front right edge and the waistband. Sew the **BUTTONS** in the front middle onto the yoke, the left front piece, the waistband and the cuffs.

