
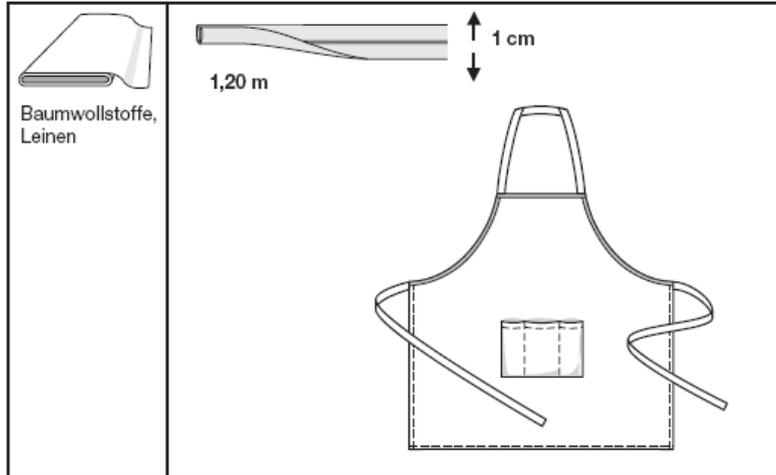



burda Download, instructions apron 8125C

		45 ins /114 cm	55 ins /140 cm
	yds	1 1/4 →	1 →
	m	1.10 →	0.90 →

→ with nap



Patternpieces:

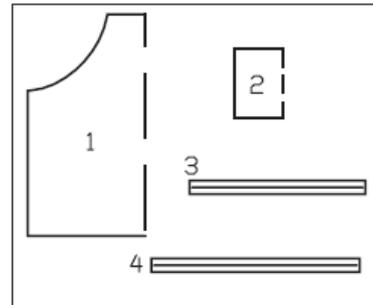

Pattern

- 1 apron piece 1x
- 2 Pocket 1x
- 3 Strap / neck 1x
- 4 tie-strap 2x

Paper cut for ANSI A (German DIN A4) prints:

The patterns are printed out on 15 sheets with a thin frame. Wait, until all sheets are printed out. Arrange the sheets so that they fit together (see extra page with the overview of the prints). Cut off the single sheets on the upper and right edge along the thin frame lines. Begin with the left lower sheet and then glue the parts in the frame lines together precisely. Select your size according to the Burda-dimension table: Dresses, blouses, jackets and coats according to the bust size, trousers and skirts according to the hip width. Change the patterns according to size (inches or cm) if necessary, to fit your measurements if they deviate from the Burda-dimension table. Cut out the pattern according to your size.

SEAM AND HEMLINE ALLOWANCES


are included on an average:
5/8" (1.5 cm) for all edges and seams.

The cutting diagrams on the pattern sheet show how the pattern pieces should be placed on the fabric.

For a single layer of fabric, the pattern pieces are pinned to the right side of the fabric. For double layers of fabric, the right sides are facing and the pattern pieces are pinned to the left side. The pattern pieces that are shown in the cutting diagram, extending over the fold of the fabric, should be cut last from a single layer of fabric.

MARKING

The dashed lines (---) on the pattern show, where the pattern pieces are sewn together. Mark important signs and lines on the pattern, e.g. cross lines and fold lines before you remove the pattern from the fabric. Use BURDA copying paper and the copying wheel (see instructions in the packaging) or use needles and tailor's chalk. You can mark the cross lines by cutting slightly into the allowances. Transfer the fold lines to the right fabric side using basting stitches.

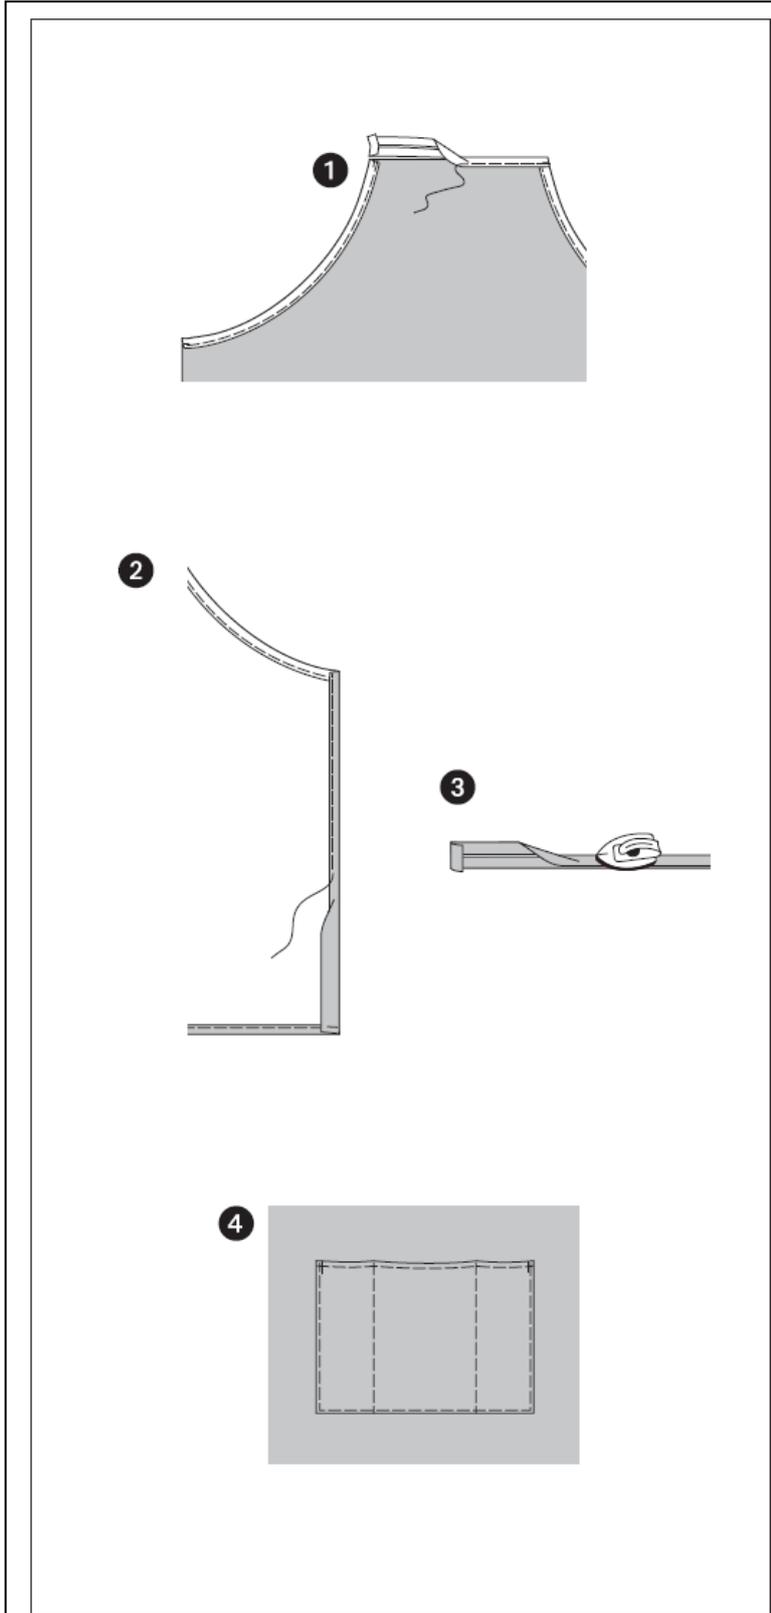

SEWING

When sewing the right fabric sides are facing. Transfer all lines on the pattern using a basting stitch to the right fabric side.

APRON

Border edges

1 First border the rounded lateral apron edges, then the upper edge using the pre-seamed strap. Fold half of the strap around the edges, baste and stitch narrowly, thereby enclosing the edges. Fold the lateral strap ends towards the inside.

Hem and lateral edges

2 Press allowances inwards, fold and stitch.

Straps

3 Press allowances of all edges towards the inside. Fold one half of the strap and press. Stitch edges narrowly on top of each other. Stitch the tie straps between the marked cross lines. Stitch the short strap (for the head) under the upper apron edges.

Pocket

4 Neaten the allowances all around and press towards the inside. Stitch the allowance of the upper edge, around ¼ inch (0.7 cm) from the edge. Pin the pocket, the fold lines meeting, onto the apron and stitch. Additionally stitch the pocket lengthwise as marked.