



burda Download-Pattern Skirt 8164- Instructions

●●□□ easy


		45 ins / 114 cm					55 ins / 140 cm					59 ins / 150 cm										
Sizes	US	6	8	10	12	14	16	18	6	8	10	12	14	16	18	6	8	10	12	14	16	18
	Eur.	32	34	36	38	40	42	44	32	34	36	38	40	42	44	32	34	36	38	40	42	44
	yds	-					-					1 1/4										
	m	-					-					1.65										
Lining	yds	2 1/4					1 1/4					-										
	m	2.15					1.55					-										

→ with nap

IMPORTANT! extra fabric required to match plaids

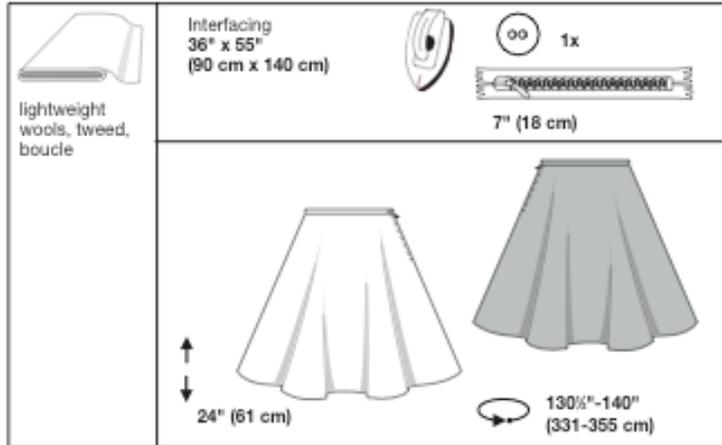

Pattern pieces:

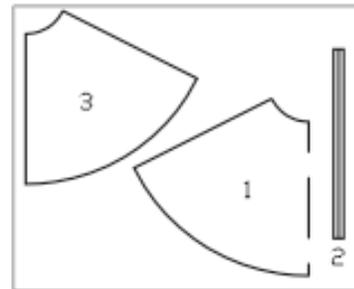

Pattern Pieces

1 Front and Back Skirt Piece	2x
2 Waistband	1x
3 Front and Back Lining	4x

Copy Paper with DinA4 Print:

The pattern pieces are printed with a narrow border onto 27 pages. Wait until all pages are printed. Arrange the pages as depicted in the page with instructions on how to put the pages together.

Cut the pages at the upper right edge along the narrow border. Start with the lower left page and glue the pieces together at the border lines.

Choose the size of the patter according to the Burda measurement chart. The sizes for dresses, Blouses, Jackets and Coats are determined by the bust measurement, the sizes for pants and skirts are determined by the hip measurement.

Adjust, if necessary, if your measurements differ from the Burda measurement chart.

Cut the pattern pieces for your size.

Fabric Fold (-----) means: This is the middle of a pattern pieces, not an edge or a seam. The piece is cut twice the size of the pattern; the fabric fold is the middle axis of the piece.

The pattern pieces with interrupted outlines are placed onto the fabric with the printed side facing down.

The cutting plans show how to arrange the pattern pieces on the fabric.

If fabric is not folded, pin the pattern pieces to the right side.

If fabric is folded, pin the pattern pieces with the right side of the fabric facing inside. Pin pattern pieces on wrong side.

Place cutting plan over the selvage, finally, cut with fabric not folded.

Seam and Hem Allowances are included in the pattern:

3 cm (1 ¼ inches) at hem and **1.5 cm** (1/2 inch) at all other seams.

Using Burda copy paper, transfer the lines and marking on the pieces onto the wrong side of the fabric.

Instructions are included in the package.

LINING

Cut lining according to piece 3.

⇒See copy paper

Seam and Hem allowances are included in the pattern:

1.5 cm (1/2 inch) at all edges and seams.


INTERFACING

Cut interfacing according to the drawing and iron onto wrong side of fabric.

Sewing

When sewing, the right sides of the fabric are facing.

Transfer all lines of the pattern pieces onto the right side of the fabric with basting stitches

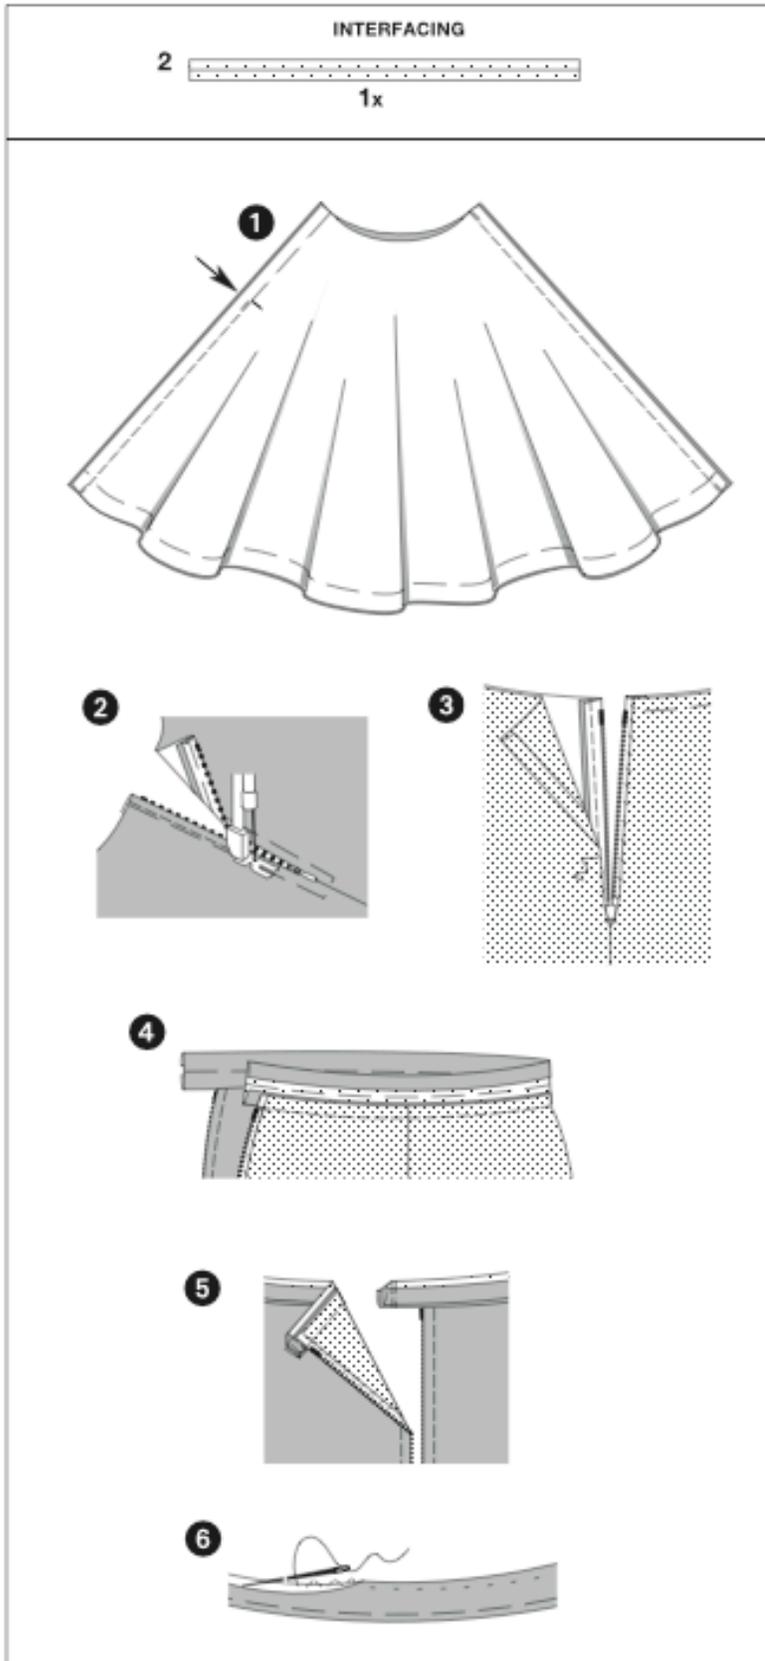

SKIRT

Side seams/Slit on left

- 1.) Place skirt pieces onto each other, right sides facing. Pin side seams. Stitch right side seam. Stitch left side seams from the slit marking downward. Secure seam ends. Leave slits pinned. De-baste seam allowances, finish. Tear basting stitches at slit.

Zip

- 2.) Pin zip underneath the slit edges so that the teeth are covered. Stitch zip using zipper foot.

LINING

Stitch front and back middle seam. Trim seam allowances; de-baste them held together and iron to side. Stitch side seams as with the skirt pieces.

Lining the skirt

- 3.) Pull lining onto the skirt, wrong sides facing. Fold apart and pin upper edges, side seams lying atop each other. Sew lining to skirt at the zipper bands.

Waistband

- 4.) Pin waistband onto the upper skirt edge, letting the underlap overlap at the back skirt piece. Stitch. Secure seam ends. Iron seam allowances into the waistband. Finish the seam allowance of the other long edge.
- 5.) Fold over waistband at the wrap line, right side inside. Stitch narrow ends onto each other. Trim seam allowances, cut diagonally at edges. Fold over and pin the waistband to the inside at the wrap line, pin to the base seam. Iron. Coming from the right skirt end, stitch all waistband lines neatly, stitching the inner half to the base seam.

Add buttonhole to the front waistband edge. Sew button to underlap

Seam

- 6.) De-baste seam, fold to the inside and pin. Iron. Stitch seam loosely by hand.

Fold and iron the lining seam to the inside. Fold in and stitch neatly, the lining skirt should be 1.5 cm (1/2 inch) shorter than the skirt.

