

## burda Download-Pattern SHIRT 8132 C – Instructions





average


fitted

Sizes	US	45 ins / 114 cm								55 ins / 140 cm							
		10	12	14	16	18	20	22	10	12	14	16	18	20	22		
	EUR	36	38	40	42	44	46	48	36	38	40	42	44	46	48		
	yds	1 1/4	1 1/4	1 1/2	1 3/4	1 3/4	1 3/4	1 3/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4	1 1/4		
	m	1.05	1.05	1.25	1.30	1.30	1.40	1.40	1.00	1.00	1.05	1.05	1.05	1.10	1.10		
		→	→	→	→	→	→	→	→	→	→	→	→	→	→		

→ with nap

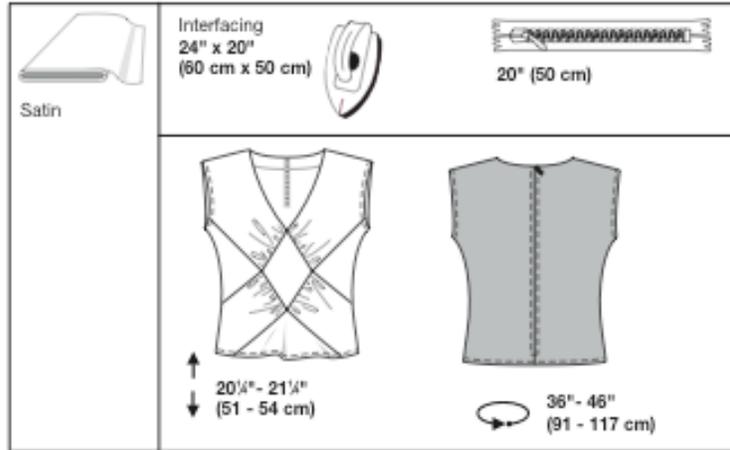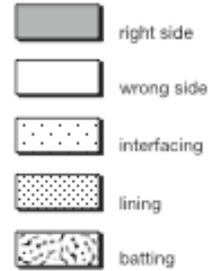

Pattern pieces:

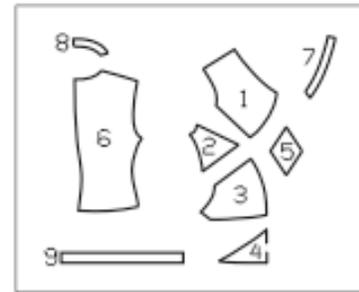

### Pattern Pieces

1 Upper Front	2x
2 Upper Side Front	2x
3 Middle Front	2x
4 Bottom Front	1x
5 Inset	2x
6 Back	2x
7 Front Facing	2x
8 Back Facing	2x
9 Bias strip/Sleeve	2x

### Copy Paper with DinA4 Print:

The pattern pieces are printed with a narrow border onto 18 pages. Wait until all pages are printed. Arrange the pages as depicted in the page with instructions on how to put the pages together.

Cut the pages at the upper right edge along the narrow border. Start with the lower left page and glue the pieces together at the border lines.

Choose the size of the pattern according to the Burda measurement chart. The sizes for dresses, Blouses, Jackets and Coats are determined by the bust measurement, the sizes for pants and skirts are determined by the hip measurement.

Adjust, if necessary, if your measurements differ from the Burda measurement chart.

**Cut the pattern pieces for your size.**

Copyright 2006 by Verlag Aenne Burda GmbH & Co. KG, Am Kestendamm 1, D-77652 Offenburg.  
Sämtliche Modelle, Schnittteile und Zeichnungen stehen unter Urheberschutz, gewerbliches Nacharbeiten ist untersagt.  
Der Verlag haftet nicht für Schäden, die durch unsachgemäße Handhabung des Schnitts, der Materialien, unsachgemäße Ausführung der Tipps und Anleitungen oder unsachgemäße Nutzung der Modelle entstehen.

## Lengthening or Shortening the Pattern

Our cut is designed for a height of 168 cm. If you are taller or shorter, you can adjust the pattern at the lines that say, "shorten or lengthen here". That way, the fit remains the same.

⇒ Always change all pattern pieces at the same line and the same length

### How to shorten or lengthen your pattern:

Cut the pattern lines at the marked lines.

(To avoid changing the shape of the pattern piece, it helps to draw a line perpendicular to the marked line, now you can adjust the pattern by moving the pieces along the perpendicular line)

**To lengthen:** Push the pieces apart as far as necessary.

**To shorten:** Push the pieces together as far as necessary.

Adjust the side edges.

## Cutting out

**Fabri Fold (-----) means:** This is the middle of a pattern piece, not an edge or a seam. The piece is cut twice the size of the pattern; the fabric fold is the middle axis of the piece.

The pattern pieces with interrupted outlines are placed onto the fabric with the printed side facing down.

### The cutting plans show how to arrange the pattern pieces on the fabric.

If fabric is not folded, pin the pattern pieces to the right side.

If fabric is folded, pin the pattern pieces with the right side of the fabric facing inside. Pin pattern pieces on wrong side.

Place cutting plan over the selvage, finally, cut with fabric not folded.

### Seam and Hem Allowances are included in the pattern:

1.5 cm at all edges and seams

With Burda copy paper, transfer the lines and marking on the pieces onto the wrong side of the fabric.

Instructions are included in the package

### Interfacing


Cut interfacing according to the drawing on left and iron onto the wrong side of the fabric.

## Sewing

### When sewing, the right sides of the fabric are facing.

All lines within the pattern pieces should be transferred onto the right sides of the fabric with basting stitches.



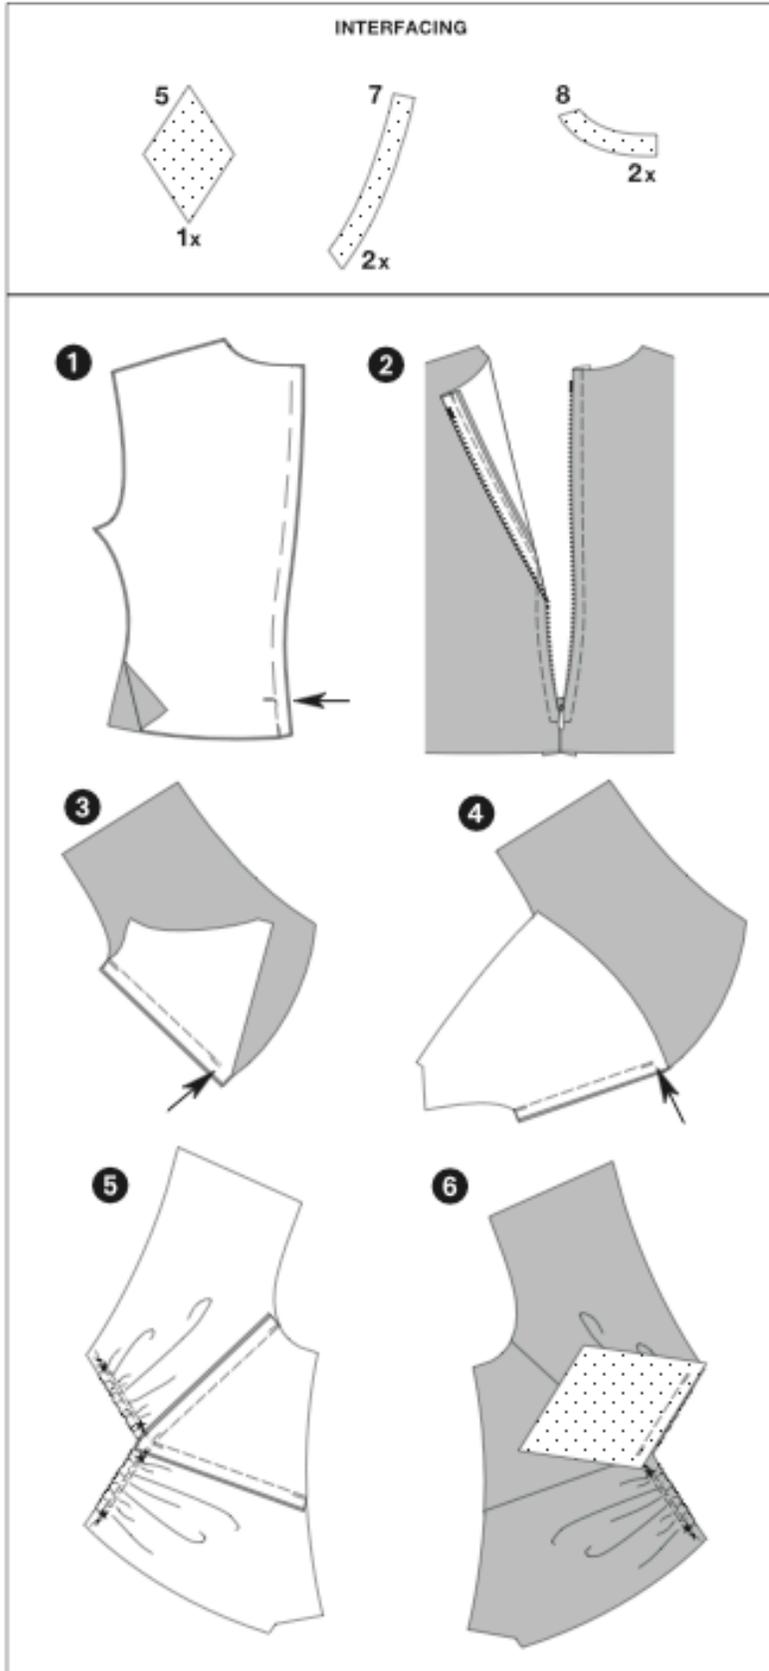

**Shirt**

**Back Middle Seam/ Slit**

- 1.) Place back pieces onto each other right sides facing. Pin middle seam coming from the slit marking (arrow) going downward. Secure seam ends. Leave slit pinned. Trim seam allowances and finish. De-baste basting stitches at slit

**Zip**


- 2.) Pin zip under the slit edges so that the teeth of the zip are covered. Stitch zip with the zip foot.

**Front Piece**

- 3.) Pin upper side pieces right sides facing onto the upper front pieces. Pin seams (seam number 6) and stitch. The seam ends at the seam allowance (arrow). Trim seam allowances, de-baste them held together and iron towards top.
- 4.) Pin middle front pieces right sides facing onto the upper side front pieces (seam number 7) and stitch. The seam ends at the seam allowance (arrow). Trim seam allowances, de-baste them held together and iron towards top.

**Inset**

- 5.) To tie in the upper and lower front pieces, stitch with 2 wide stitches in between the star symbols. Pull the bobbin thread lengthwise at the edges of the inset. Tie. Distribute width evenly.
- 6.) Stitch inset right sides facing first onto a front piece half (seam number 12) and then onto the other half, stitching exactly to the end of the seam/ the edges. Iron seam allowances.
- 7.) Stitch bottom front piece right sides facing onto the lower edge of the middle front pieces (seam number 14) and stitch, interrupting at the front middle. Secure seam ends. Trim seam allowances, de-baste them held together and iron towards top. Sow the second inset pieces folded onto the base seams on the inside.

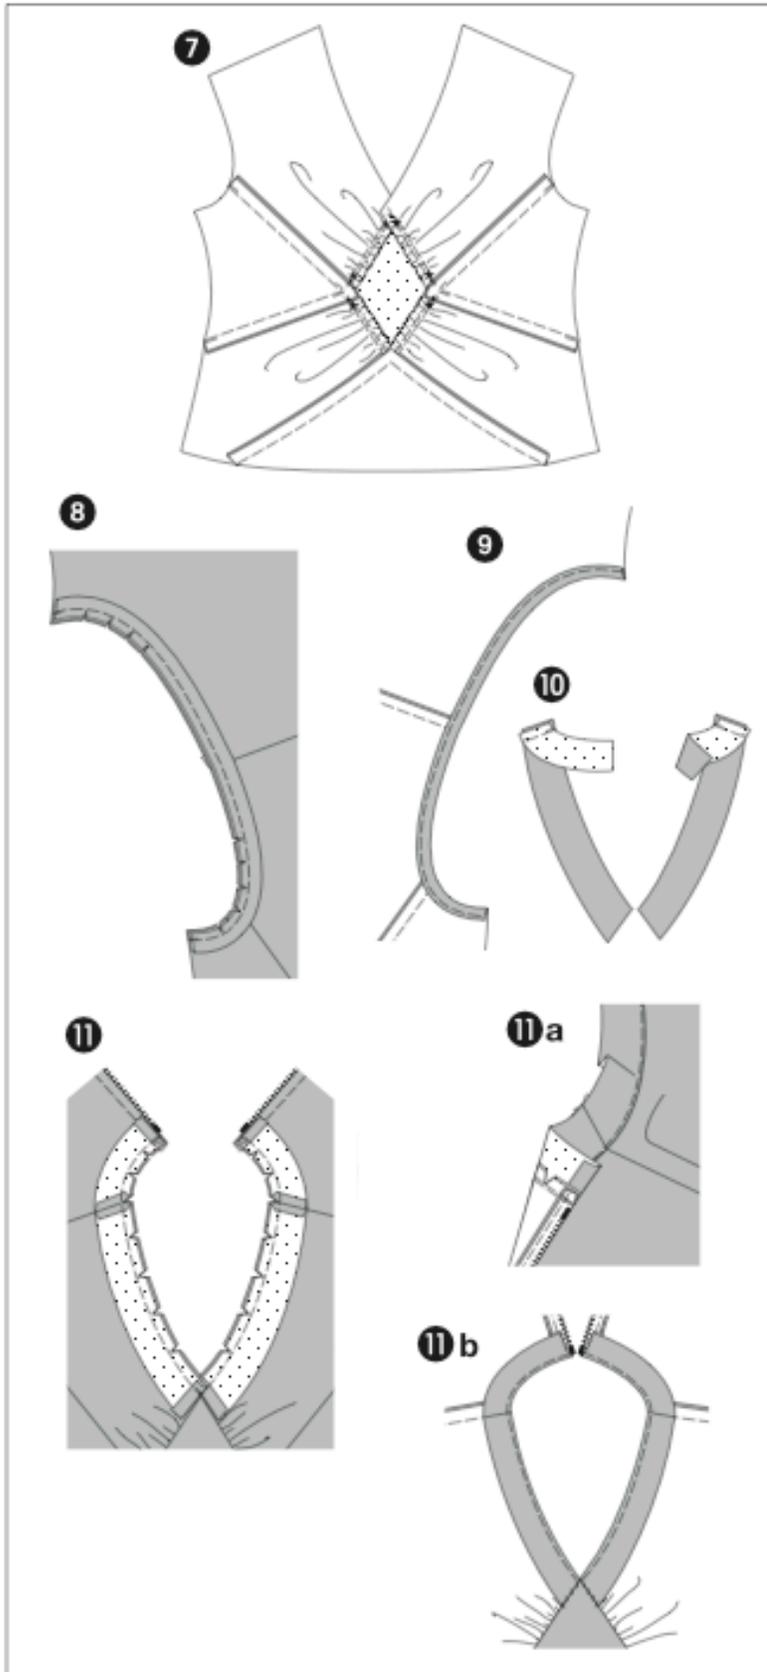

© Copyright 2006 by Verlag Aenne Burda

### Shoulder seams

Place front pieces right sides facing onto the back piece, pin shoulder seams (seam number 10) and stitch. Trim seam allowances, de-baste them folded together and iron into the back piece.

### Sleeve base/ Bias

⇒ Trim seam allowances of the sleeve base back to 1 cm ( $\frac{1}{4}$  to  $\frac{1}{2}$  inch). Fold bias lengthwise, iron.

- 8.) Pin bias right sides facing onto the sleeve base, the open edges lying atop the seam allowance. Stitch bias, allowing 1 cm ( $\frac{1}{4}$  to  $\frac{1}{2}$  inch). Trim seam allowances and cut in.
- 9.) Turn bias inside out. Stitch sleeve base edges, allowing 0.5cm ( $\frac{1}{4}$  inch).

### Side Seams

Pin and stitch side seams (seam number 13), trim seam allowances, de-baste them held together and iron into the back piece.

### Neck line/ Facing

- 10.) Place front facings right sides facing onto the back facings, stitch shoulder seams (seam number 11). Fold apart and iron seam allowances. De-baste lower facing edges.
- 11.) Pin facings right sides facing onto the neckline edges, shoulder seams are meeting. Fold in seam allowances of the front and back facing edges. Stitch facing. Trim seam allowances, cut in. Fold up facing and iron seam allowances into facing, stitch neatly. (11a). Fold in facings and iron. Sew back facing edges onto the zip bands; sew front facing edges onto the base seams of the inset.

### Seam

Cut back seam to 1 cm (about  $\frac{1}{2}$  inch), de-baste and fold in and pin. Stitch lower edges allowing 0.5 cm (about  $\frac{1}{4}$  inch), stitching the seam.

