

## burda Download-Pattern Shorts 7909 – Instructions





easy


semi-fitted

Sizes	US Eur.	45 ins / 114 cm								55 ins / 140 cm							
		6	8	10	12	14	16	18	20	6	8	10	12	14	16	18	20
ys		1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2	1 1/2
m		1.30	1.30	1.30	1.30	1.35	1.40	1.50	1.50	1.00	1.00	1.00	1.00	1.05	1.20	1.20	1.20
		→	→	→	→	→	→	→	→	→	→	→	→	→	→	→	→

→ with nap

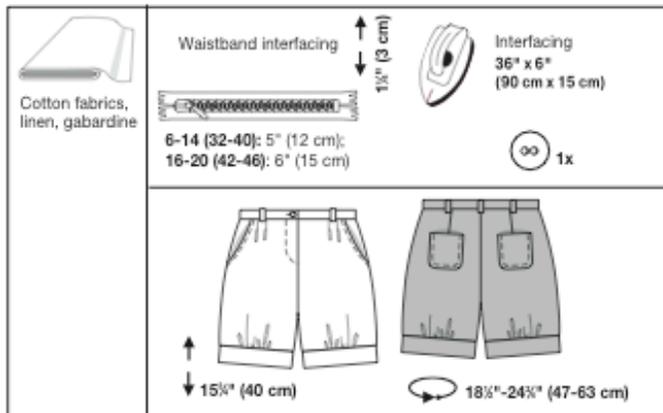

Pattern pieces:

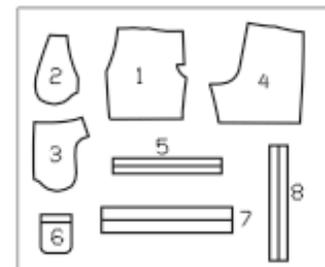

### Pattern Pieces

1 Front Pant Piece	2X
2 Pocket	2x
3 Hip Yoke Piece	2x
4 Back Pant Piece	2x
5 Waistband	2x
6 Pocket	2x
7 Cuff	2x
8 Belt Loops	1x

### Copy Paper with DinA4 Print:

The pattern pieces are printed with a narrow border onto 24 pages. Wait until all pages are printed. Arrange the pages as depicted in the page with instructions on how to put the pages together.

Cut the pages at the upper right edge along the narrow border. Start with the lower left page and glue the pieces together at the border lines.

Choose the size of the patten according to the Burda measurement chart. The sizes for dresses, Blouses, Jackets and Coats are determined by the bust measurement, the sizes for pants and skirts are determined by the hip measurement.

Adjust, if necessary, if your measurements differ from the Burda measurement chart.

**Cut the pattern pieces for your size.**

⇒ Upper Waistline: 2 cm below the waist.

## Sizes 34 to 46

In part 1, the stitching line is depicted for a size 32. For other sizes, draw the stitching line, ending at the slit marking, at the same distance of the front middle.

### Lengthening or Shortening the Pattern

Our cut is designed for a height of 168 cm. (5 feet 5 inches). If you are taller or shorter, you can adjust the pattern at the lines that say, “shorten or lengthen here”. That way, the fit remains the same.

⇒ Always change all pattern pieces at the same line and the same length.

### How to shorten or lengthen your pattern

Cut the pattern lines at the marked lines.

**To lengthen:** Push the pieces apart as far as necessary.

**To shorten:** Push the pieces together as far as necessary.

Adjust the side edges.

### Cutting out


**Fabric Fold (-----) means:** This is the middle of a pattern pieces, not an edge or a seam. The piece is cut twice the size of the pattern; the selvage is the middle axis of the piece.

The pattern pieces with interrupted outlines are placed onto the fabric with the printed side facing down. **The cutting plans show how to arrange the pattern pieces on the fabric.**

**If fabric is not folded,** pin the pattern pieces to the right side.

**If fabric is folded,** pin the pattern pieces with the right side of the fabric facing inside. Pin pattern pieces on wrong side.

Place cutting plan over the selvage, finally, cut with fabric not folded.

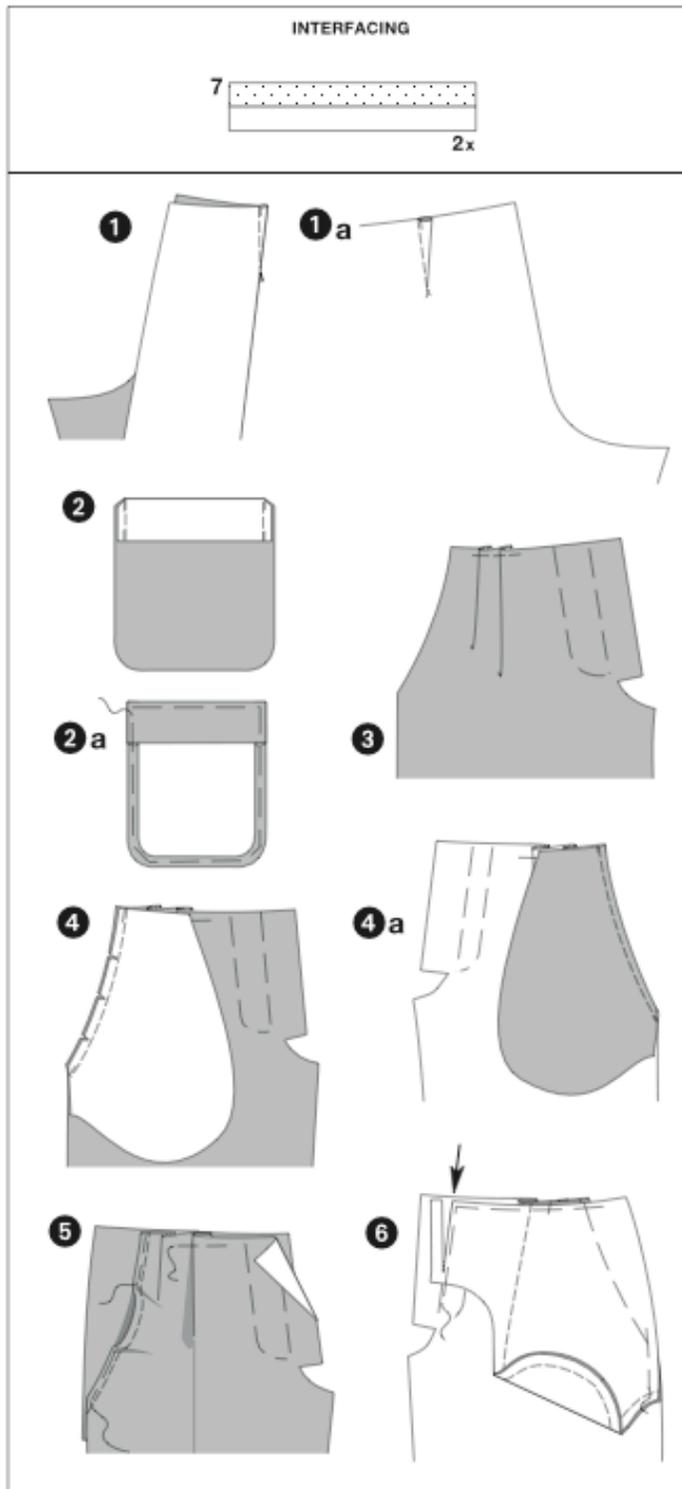

© Copyright 2006 by Verlag Aenne Burda

**Seam and Hem Allowances are included in the pattern:**

1.5 cm (1/2 inch) at all edges and seams

With Burda copy paper, transfer the lines and marking on the pieces onto the wrong side of the fabric. Instructions are included in the package.

**Interfacing**

Cut interfacing according to drawings and iron onto the wrong side of the fabric.

**Sewing**

When sewing, the right sides of the fabric are facing.

All lines within the pattern pieces should be transferred onto the right sides of the fabric with basting stitches.

**Pants**

**Darts**


- 1.) Stitch darts of the back pant pieces from edge toward point. Tie thread. Iron dart to the back middle. (1a).

**Pockets**

- 2.) Trim edges. Turn trimming outside at the wrap line. Stitch small edges onto the pocket. Fold over trimming and seam allowances
- 3.) Lay pleats of the front pant pieces in the direction of the arrow. Pin.

**Hip Yoke Pockets**

- 4.) Place pocket right sides facing onto the front pant piece. Pin pocket edges onto each other (seam number 1) and stitch. Fold over and pin pocket to the inside. Iron edge and stitch, allowing 0.7cm (1/4 inch) (4a).
- 5.) Pin the front pant piece to the hip yoke piece so that the opening of the pocket Meets with the line marked BASE, right sides of the pocket and the hip yoke are facing. Adjust the pocket opening, pin as depicted.
- 6.) Place the pocket piece onto the hip yoke piece; do not take in the front pant piece. Stitch. De-baste seam allowances held together. Pin the side, upper and front edges of the hip yoke pieces onto the front pant piece. Pay attention: At the right hip yoke piece, cut the seam allowance of the front edge at the front middle (arrow)

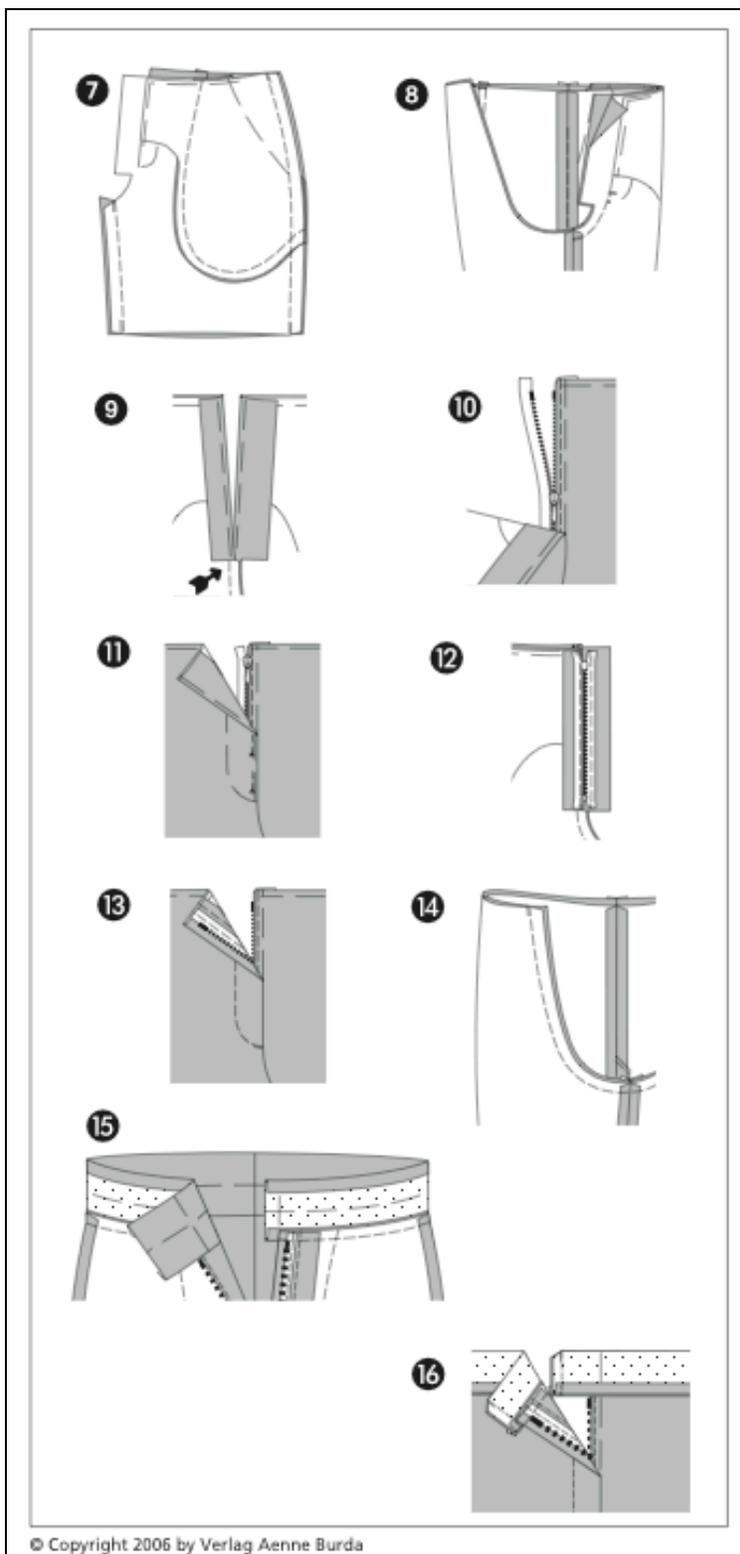

### Side Seams/ Inner Leg Seams

- 7.) Place front pant pieces right sides facing onto the back pant pieces. Stitch side seams (seam number 2), pin inner leg seams (seam number 3). Stitch seams. Trim seam allowances and finish.

### Front Middle Seam

- 8.) Turn one pant leg. Push pant legs into each other, right sides facing. Stitch middle seam from the slit marking until you reach the inner seam lines. Secure seam ends. Cut back the seam allowances at the rounded edge. Trim seam allowances; also trim them at the front trimmings and the back middle seam.

- 9.) Pin the trimming of the right front pant piece to the inside of the front middle. At the left front pant piece, let the trimming stick out 1 cm as underlap- this will cover the zip later. Fold and pin the remaining trimming, iron.

- 10.) Pin the trimming close to the zip teeth onto the zip band and stitch neatly.

- 11.) Close zip. Pin slit close middle on middle.

- 12.) Pin the zip band onto the right trimming, do not take in the pant piece. Stitch.

- 13.) Stitch right slit edge as depicted, taking in the trimming.

### Back Middle Seams

- 14.) Push pant legs into each other again, right sides facing. Stitch back middle seam. Fold apart and iron the seam allowances from the top to the point where it starts curving.

### Waistband


Place waistband pieces onto each other, right sides facing. Stitch middle seam. Finish seam allowances.

- 15.) Pin waistband middle on middle onto the upper pant edge (seam number 4).

Stitch. Iron the seam allowances into the waistband, iron the allowances of the Other long edge to the inside.

- 16.) Fold waistband at wrap line, right side inside. Stitch narrow edges onto another, at the right for the front middle, at the left for the underlap. Trim seam allowances. Cut edges diagonally. Turn waistband, pin to the base seam on the inside. Stitch all waistband edges neatly, stitching the inner half.

Integrate buttonhole into the right side of the waistband. Sew button to the underlap.

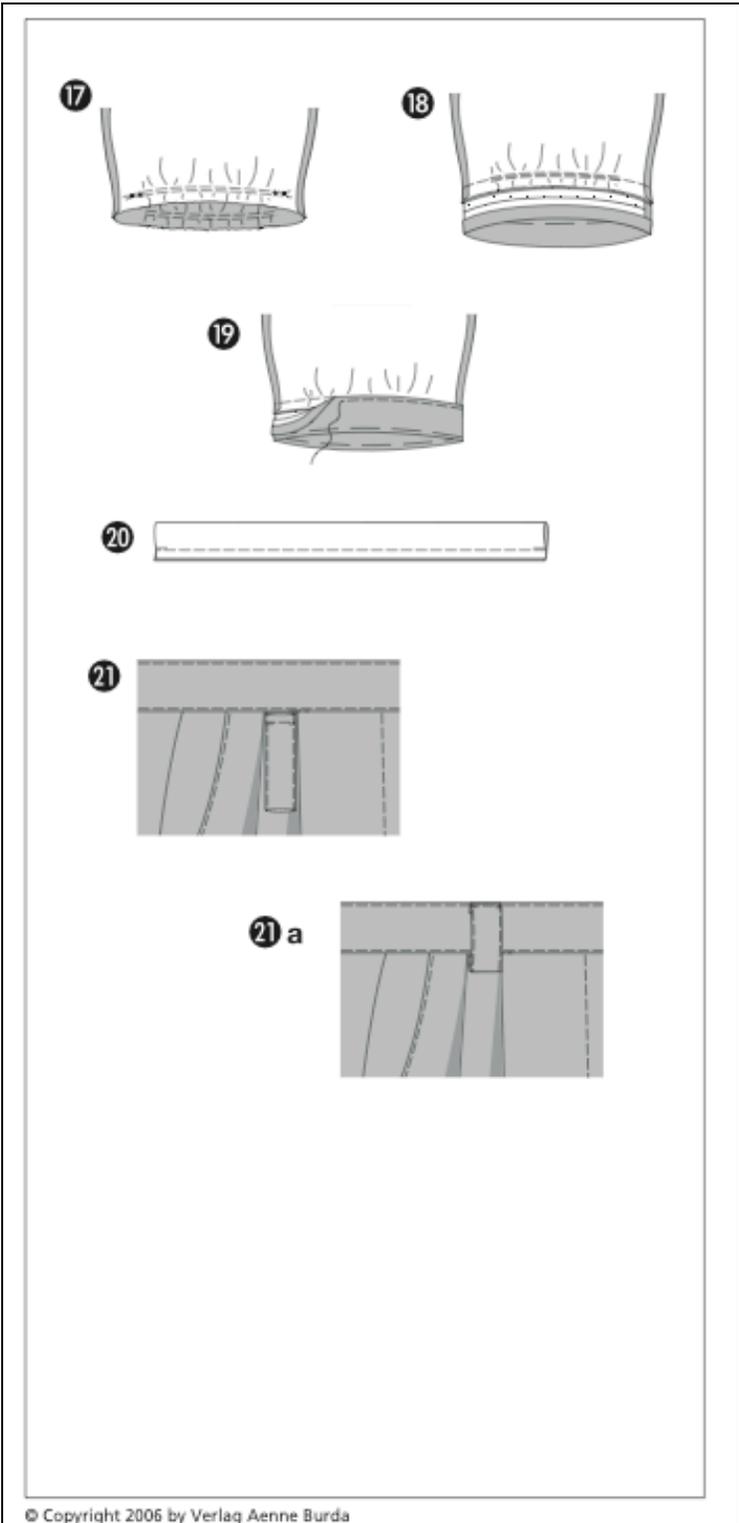

© Copyright 2006 by Verlag Aenne Burda

**Pant Cuff**

Fold cuff, right side inside. Stitch narrow edges onto each other. Finish seam allowances.

- 17.) Take in lower pant edge, stitching with wide stitches from star symbol to star in two rows next to each other. Pull bobbin thread so it matches cuff width. Tie thread. Distribute width evenly.
- 18.) Pin cuff half with interfacing onto the lower pant edge right sides facing (seam number 5). The cuff seam meets the side seam; the horizontal line meets the inner leg seam. Stitch cuff. Iron seam allowances into the cuff. Finish the seam allowance of the other long ends.
- 19.) Turn cuff to the inside at the wrap line, pin to the base seam. Stitch cuff edge. Neatly, stitching the inner half as well.

**Loops**

- 20.) Fold strip lengthwise, right side inside. Stitch long edges onto each other 2 Cm (3/4 inch) from the wrap line. Trim seam allowances. Turn strip. Pin edges, iron and stitch neatly. Cut strip into 5 pieces of equal length. De-baste ends.
- 21.) Stitch loops between the pleats, above the darts and the back middle seam according to the drawing and stitch 0.7 cm (1/4 inch) from the waistband seam base. Turn loops up, fold in and stitch neatly onto the upper waistband edge (21a).

